

**THE CROMMELIN GROUP** 





# CUTTING & DRILLING

### CROMMELINS ELECTRIC BRICK SAW

These robust bricksaws have been designed to operator use and transport easier and safer. The models are single phase electric powered and the cutting blade is water cooled by attaching a hose to the water fitting. These bricksaws will make easy work of cutting your bricks, limestone and tiles.

### **STANDARD FEATURES**

- Extendable handles for lifting and transport
- Weight adjustable spring loaded cutting head
- Sliding tray with rail system
- Heavy duty mitre guide
- Motor capacitor box crash plate
- Large never-flat wheels
- Assembled and tested in Australia
- 1 Year manufacturer's warranty

### **IDEAL FOR**

- Hire and rental
- Contractor
- DIY

### **OPTIONAL EXTRAS**

• Diamond blades

	CBS350CE
BLADE SIZE (MM)	350MM
CUTTING DEPTH (MM)	120MM
CUTTING TABLE SIZE (MM)	860 x 440MM
SLIDING TRAY SIZE (MM)	280 x 460MM
BLADE FLANGE SIZE Ø (MM)	
ARBOR HOLE	
MOTOR WATTAGE (W)	1700W
MOTOR BRAND	CMG
SHAFT SPEED (RPM)	2880RPM
WEIGHT (DRY)	109KG (INCLUDING STAND)
DIMENSIONS (LxWxH)	1200 x 780 x 1620MM
MANUFACTURERS WARRANTY	1 YEAR



### GOLZ TILE SAWS

This professional rail tile saw with a durable low maintenance guide rail system comes standard with a small electric pump located in the water catchment tray, is excellent for cutting precision and has extensions to the tray for cutting large tiles.

### **IDEAL FOR**

- Hire and rental
- Tilers
- Construction
- DIY

#### **STANDARD FEATURES**

- Water cooled cutting blade
- Adjustable tilt saw head & rail to cut 90° & 45°
- Adjustable cutting length
- Removable water tub, cutting table for easy cleaning
- Removable blade guard for easy blade changes
- Foldable legs for transport and storage
- Rear wheels for transport onsite
- 1 Years manufacturer's warranty
- Comes with 200 or 250mm blade (depends on model)

### **OPTIONAL EXTRAS**

Diamond blades



BLADE SIZE (MM)	200MM
CUTTING DEPTH (MM)	40MM
CUTTING LENGTH (MM)	560MM
CUTTING TABLE SIZE (MM)	720 x 480MM
BLADE FLANGE SIZE Ø (MM)	64MM
ARBOR HOLE	25.4MM
MOTOR WATTAGE (W)	1300W
SHAFT SPEED (RPM)	2800RPM
WEIGHT (DRY)	57KG
DIMENSIONS (LxWxH)	1220 x 540 x 1299MM
MANUFACTURERS WARRANTY	1 YEAR



	TS250
BLADE SIZE (MM)	250MM
CUTTING DEPTH (MM)	65MM
CUTTING LENGTH (MM)	980MM
CUTTING TABLE SIZE (MM)	1140 x 480MM
BLADE FLANGE SIZE Ø (MM)	64MM
ARBOR HOLE	25.4MM
MOTOR WATTAGE (W)	1300W
SHAFT SPEED (RPM)	2800RPM
WEIGHT (DRY)	72KG
DIMENSIONS (LxWxH)	1640 x 540 x 1299MM
MANUFACTURERS WARRANTY	1 YEAR



### GOLZ FLOOR SAWS

These German designed compact road saws are made for asphalt and concrete cutting. The Golz floor saws are ideal for small road repair jobs and small services. If you are in the building/construction or civil works fields there is a GÖLZ product to suit your needs

#### **STANDARD FEATURES**

- Adjustable anti-vibration handles for operator comfort
- Cutting depth adjustment by handwheel with depth indicator
- Push style cutting
- Front cutting guide
- Parking break with big rear wheels
- Lifting hook
- 25L water tank
- Durable Poly-V belt for an optimum power

### **OPTIONAL EXTRAS**

- Diamond blades
- Honda powered [FS125]



	F3123
BLADE SIZE (MM)	350MM
CUTTING DEPTH (MM)	120MM
BLADE SHAFT SIZE (MM)	25.4MM
WATER TANK (L)	25L
HAND VIBRATION	4.5 M/S <sup>2</sup>
MOTOR MODEL	7HP EX21
MOTOR BRAND	ROBIN
SHAFT SPEED (RPM)	2730RPM
WEIGHT (DRY)	84KG
DIMENSIONS (LxWxH)	650 x 450 x 1000MM
MANUFACTURERS WARRANTY	1 YEAR



### **IDEAL FOR**

- Hire and rental
- Contractor
- Road repairs
- Cutting trenches for piping





	FS175
BLADE SIZE (MM)	450MM
CUTTING DEPTH (MM)	165MM
BLADE SHAFT SIZE (MM)	25.4MM
WATER TANK (L)	25L
HAND VIBRATION	4.5 M/S <sup>2</sup>
MOTOR MODEL	14HP EX40
MOTOR BRAND	ROBIN
SHAFT SPEED (RPM)	2300RPM
WEIGHT (DRY)	126KG
DIMENSIONS (LxWxH)	1220 x 491 x 1160MM
MANUFACTURERS WARRANTY	1 YEAR

T

## GOLZ 2-STROKE CORE DRILL

Powered by a STIHL 2-stroke engine, this core drill is the original and most modern solution in pipe and sewage drilling for house connections and surface water. Golz Core Drills are manufactured for easy and convenient operation in building construction.



#### **STANDARD FEATURES**

- Genuine Stihl 2-Stroke engine
- 45° and 90° drilling (engine allows any angle drilling)
- Gearbox with water swivel
- Drill stand with pipe base (self centering)
- 4m Flexible exhaust hose extension
- Ground frame with 2 ground fixing spikes
- Fastening straps with ratchets (fixing onto pipes)
- 10L pressurised water tank
- Light weight design for the industry

#### **IDEAL FOR**

- Hire and rental
- Construction
- Sewage pipes
- Civil works
- Contractor







	KB330 -
CORE DRILL SIZE (MM)	100 TO 354MM
TRAVEL LENGTH (MM)	450MM
DRILL SPEED (RPM)	300RPM
OPERATION	WET
ENGINE MODEL	2.8KW FS560
ENGINE BRAND	STIHL
FUEL TYPE	2-STROKE
FUEL TANK	990ML
WEIGHT (DRY)	45KG
DIMENSIONS (LxWxH)	550 x 410 x 800MM
MANUFACTURERS WARRANTY	1 YEAR



90° Drill in sewage pipe. Fixing by ground spikes



90° Drill in sewage pipe. Pipe base clamped between concrete pipe and trench and secured by ground spikes.




90° Drill concrete pipe. Fixing by vacuum pads (accessory).



45° Drill in cast iron pipe. Fixing by strap, clamping ratchet and angle support (accessory).



### GOLZ ELECTRIC CORE DRILLS



### **STANDARD FEATURES**

- External drill bit connection 1¼" UNC
- Internal drill bit connection R<sup>1</sup>/<sub>2</sub>"
- Soft start and thermal overload protection
- PRCD integrated in the power cord
- 3x Speed operation
- Gardena water connection
- Horizontal & vertical bubble Levels
- Toolset SW32 & SW41 inclusive

### **IDEAL FOR**

- Hire and rental
- Construction
- Fencing
- Electricians
- Plumbers



A rubber seal creates vacuum for anchor-less drilling. The vacuum keeps suction even with it turned off

- 250 Watt
- 25L/min (1500L/hr) suction volume
- 5L Safety tank
- Vacuum breaker
- Super quiet running
- 13kg weight
- IP44 Compliant

### DRILLSTAND KB125

- 650mm travel length
- Ø 250mm drilling diameter
- Up to 45° angle drilling
- Standard 60mm ring collar for core drills
- Aluminium roller carriage with smooth & precise guiding
- Left and right handed operation
- Laser pointer for accurate setup
- Anchor / Vacuum base
- 12kg weight
- 505 x 350 x 945mm
- Tool and fastening kit included



DRILL STAND DRILLING (MM)	20 TO 160MM
DRILL TYPE	PISTOL GRIP
DRILL SPEED (RPM)	520 / 1400 / 2900RPM (3X SPEED)
DRILL BIT CONNECTION	11/4" UNC + R1/2"
RING COLLAR (MM)	60MM
MOTOR SIZE (W)	2200W
WEIGHT (DRY)	6.5KG
DIMENSIONS (LxWxH)	422 x 100 x 295MM
MANUFACTURERS WARRANTY	1 YEAR

FB33P







### DIAMOND CORE DRILL BLADES BITS

### DIAMOND BLADES

Crommelins have a variety of blades for most applications. Three quality types is avaialble, GÖLZ Premium, GÖLZ Silent & CROMTECH™.

### **GOLZ PREMIUM BLADES**


- 8" & 10" Ceramic Tile blades, sintered, cutting for ceramic, porcelain tiles, thin segment.
- 8" Combination blades, sintered, cutting in medium intensive tiles, thin segment.
- 14" & 18" Concrete premium, 12mm segmented.
- 14" to 18" Asphalt premium, 12mm segmented.
- 14" & 16" Combination premium, 16mm segment height, special cooling holes for reducing heat and keeping stable performance.
- 14" & 16" Combination super premium, 16mm segment height, RX1.

### **GOLZ SILENT BLADES**

• 14" & 16" Combination super premium silent, 16mm segment sandwich design with steel core, RX1 whisper.

### **CROMTECH BLADES**

- 8" & 10" Combination tile blades, thin segment.
- 14" Combination blade laser welded, 12mm segment.
- 14" & 18" Concrete laser welded, 12mm segment.
- 14" & 18" Asphalt laser welded, 12mm segment.

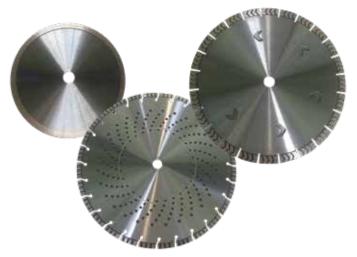

### **CORE DRILL BITS**

Drill Bits for concrete, reinforced concrete, brickwork, asphalt and granite. Excellent performance.

### **STANDARD FEATURES**

- External drill bit connection 1¼" UNC standard attachment
- Internal drill bit connection R<sup>1</sup>/2"
- Diamond core bit with 3-hole flange [KB350]

### CORE DRILL RANGE

- 25 to 66mm at 220mm length For concrete with light to medium with reo and masonry
- 16 to 400mm at 450mm length For concrete with light to medium reo and masonary
- 4" to 10" Core drills with 3 bolt flange







# WARRANTY





### **3 YEAR ROBIN ENGINE WARRANTY**

Robin Industrial Engines and Robin Imported Products (Pumps, Generators) come with a 3 year manufacturer's warranty.



### **2 YEAR MANUFACTURER'S WARRANTY**

CROMMELINS™ brand products powered by a Robin Industrial Engine come with a 2 year manufacturer's warranty.



### **1 YEAR MANUFACTURER'S WARRANTY**

All other products including CROMMELINS<sup>™</sup>, CROMTECH<sup>™</sup>, flexible drive products (ie FP2T), high pressure pumps and imported products come with a 1 year manufacturer's warranty.



#### **OTHER BRANDS WARRANTY**

Other branded products come with warranties provided by their manufacturer, ie. Golz, American Sanders, AR Blue Clean.

### AWARD WINNING SERVICE & BACKUP

PAGE || 111

### WARRANTY EXPLAINED

Crommelins Machinery warrants their goods against defects in materials and workmanship under normal use and service.

The Crommelins Machinery warranty does not cover fair wear commensurate with the age of the product, any damage caused by accident, abuse, misuse, neglect or failure to observe proper operating instructions or proper machinery maintenance as described in the instruction manual.

It is the owners responsibility to regularly maintain a product in accordance with the owners manual and only use the equipment for its designed purpose.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

### **CONSUMER ADVICE**

Any claim under these warranties must be made within warranty period from the date of purchase of the product.

To make a claim under the warranty, you must return the product (with proof of purchase) to the closest warranty agent or to the place of purchase.

Where a failure does not amount to a major failure, Crommelins Machinery is entitled to choose between providing you with a repair, replacement or refund. To obtain compensation, you would need to provide documentary evidence of the loss or damage suffered, and documentary evidence that such loss or damage was a reasonably foreseeable consequence of a failure by Crommelins Machinery to comply with a consumer guarantee under the Australian Consumer Law. CROMMELINS<sup>™</sup>, CROMTECH<sup>™</sup>, CROMTECH OUTBACK<sup>™</sup>, CROMMELINS FINANCE<sup>™</sup>, DOLPHIN<sup>™</sup> is registered trademarks of Crommelins Operations Pty Ltd, trading as The Crommelin Group.

### SERVICE AGENTS

There are over 185 national authorised service/repair agents available, visit www.crommelins.com.au for their details and locations. For engine brands other than Robin please contact the manufacturer for service agents.

### **CROMMELINS PRODUCTS**

Crommelins takes pride in all products they sell and they live by their company Mission Statement; "To be the supplier of choice to Hire and Construction Industry by providing high quality portable powered products."

#### THE CROMMELIN GROUP

	ABN 11 008 889 656
	PO Box 352, BENTLEY WA 6982
PH	(08) 9350 5588
FAX	(08) 9451 6381
Е	email@crommelins.com.au







**EDITION 2 - NOV 2018**